


**NOTE:**


1. PRIOR TO BORING FOR SLEEVE INSTALLATION, BORE EXISTING SLEEVE TO FINISH BORE DIMENSION  $+0.020$  STOPPING AT MAIN BEARING WEB.
2. BORE CENTER = 3.873

REVISIONS

REV	DESCRIPTION	DATE	APPROVAL

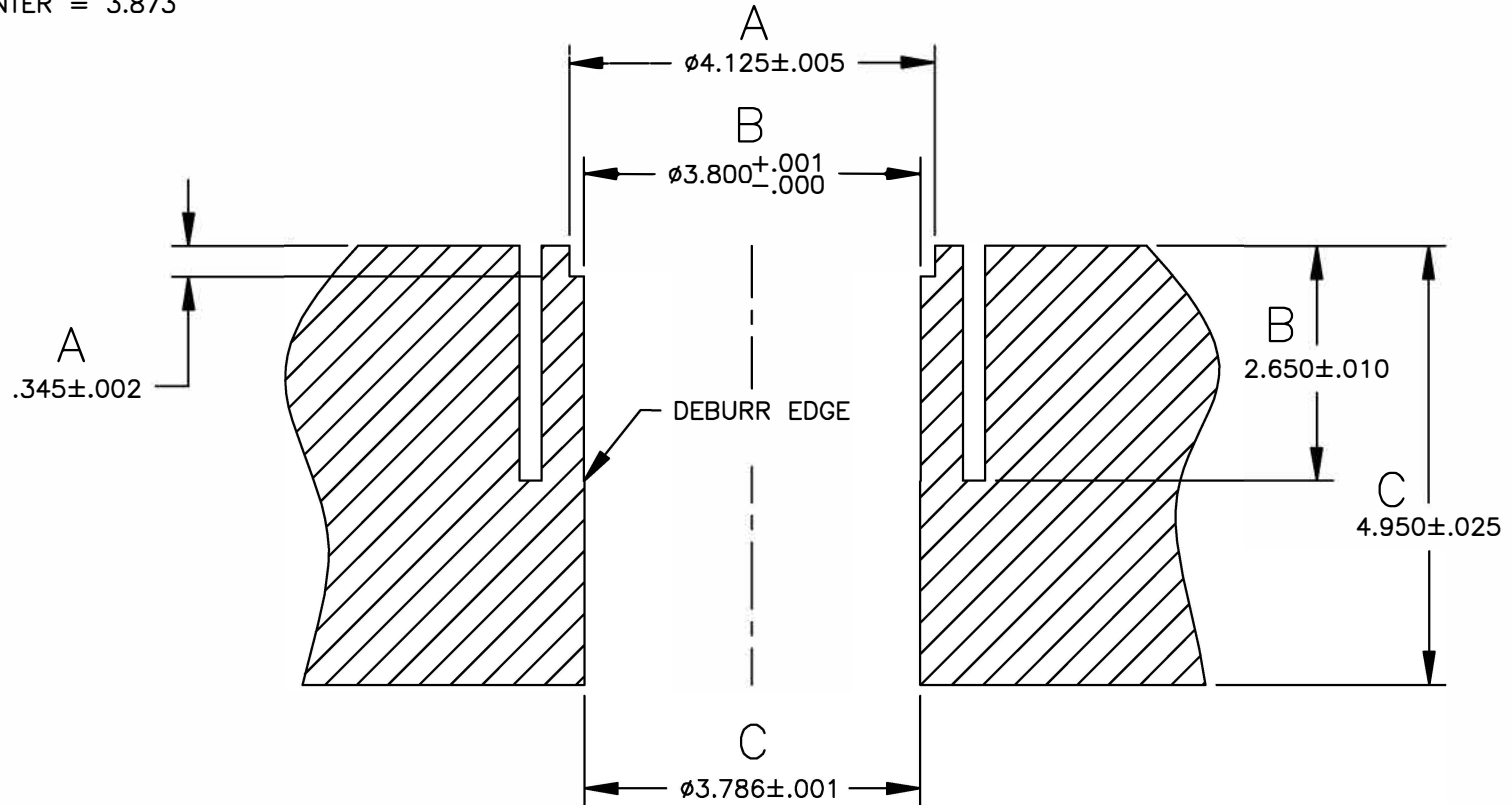

THE INFORMATION DEPICTED HEREIN IS PROPRIETARY DESIGN INFORMATION WHICH IS COPYRIGHTED DARTON INTERNATIONAL, INC. NO DUPLICATION OR USE OF THIS INFORMATION IS PERMITTED WITHOUT EXPRESS WRITTEN CONSENT OF DARTON INTERNATIONAL, INC.

DR. BY:	CAD DEPT	 <b>Darton International, Inc.</b> Carlsbad, CA USA (800) 713-2786 (760) 603-9895 FAX (760) 603-9829 WWW.DARTON-INTERNATIONAL.COM		
DATE:	06/19/06			
CHKD BY:		TITLE		
MATERIAL:		BLOCK SPECIFICATION- SUBARU EZ-30 98.2mm BORE		
HARDNESS:		SIZE	DWG NO.	REV
		A	300-028	-
		SCALE	SHEET 1 OF 1	
		NONE		