


**NOTE:**


1. AFTER SLEEVES ARE INSALLED AND LOCTITE IS CURED, MACHINE WITH A  $\phi.750$  SPOT FACE TOOL BOTTOM OF SLEEVE DOWN FLUSH WITH PISTON OILER SURFACE OF BLOCK.

REVISIONS

REV	DESCRIPTION	DATE	APPROVAL

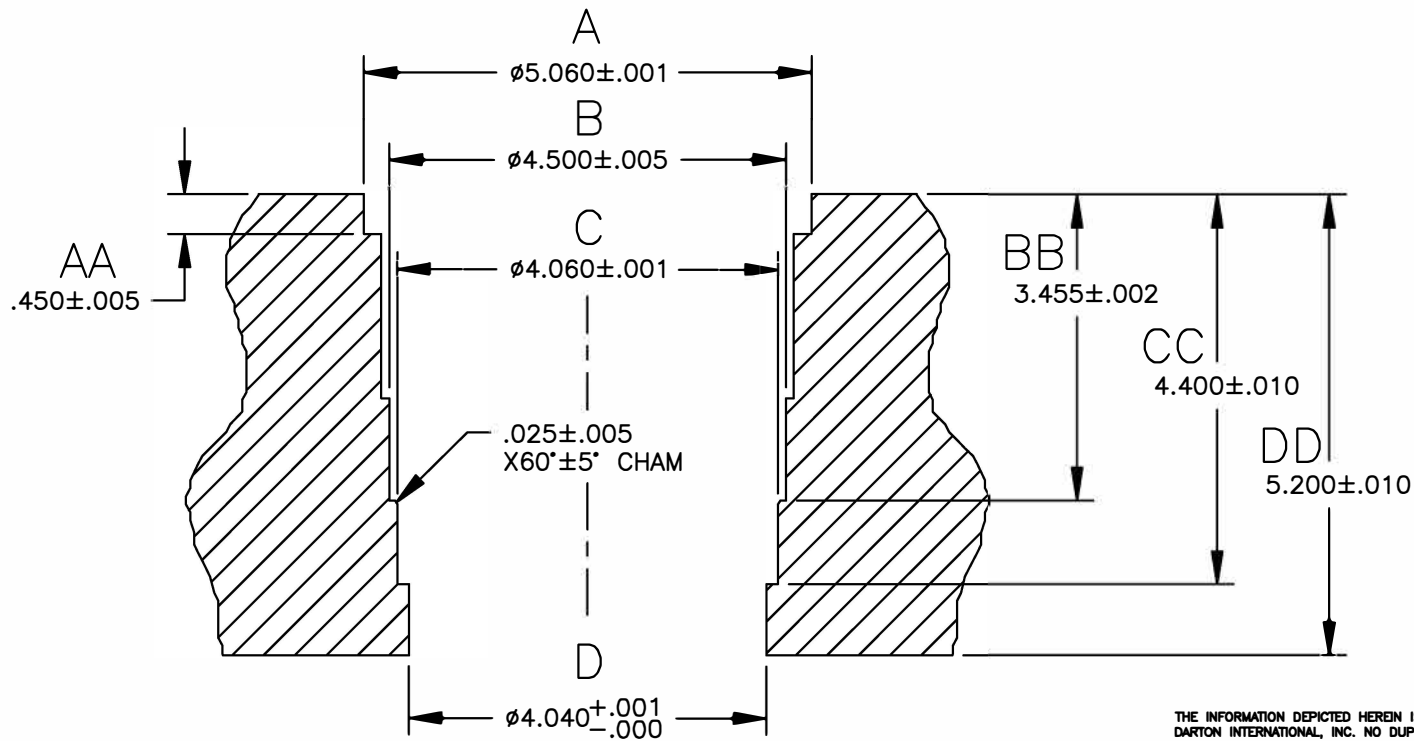

THE INFORMATION DEPICTED HEREIN IS PROPRIETARY DESIGN INFORMATION WHICH IS COPYRIGHTED DARTON INTERNATIONAL, INC. NO DUPLICATION OR USE OF THIS INFORMATION IS PERMITTED WITHOUT EXPRESS WRITTEN CONSENT OF DARTON INTERNATIONAL, INC.

DR. BY: CAD DEPT	 <b>Darton International, Inc.</b> Carlsbad, CA USA (800) 713-2786 (760) 603-9895 FAX (760) 603-9829 WWW.DARTON-INTERNATIONAL.COM
DATE: 09/19/07	
CHKD BY:	TITLE: BLOCK SPECIFICATION- NISSAN VQ-35HR 9.5-100mm
MATERIAL:	SIZE: A DWG NO. 800-210 REV: -
HARDNESS:	SCALE: 1/2 SHEET 1 OF 1