



NOTE:

1. MACHINE BLOCK BORE AT .010 OVER FINISH BORE SIZE DOWN TO MAIN WEBBING BEFORE SLEEVE INSTALL.
2. MACHINE DIMENSION A AT .001 TO .002 CLEARANCE.
3. MACHINE DIMENSION B TO REMOVE CYLINDER WALLS.
4. MACHINE DIMENSION C AT .001 TO .002 CLEARANCE.
5. BLOCK BORE CENTER = 4.1535 (105.5mm).
6. APPLY LOCTITE #518 OR #620 TO BLOCK BORE A.
7. DECK BLOCK SURFACE AFTER LOCTITE HAS CURED (4 TO 8 HOURS).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL

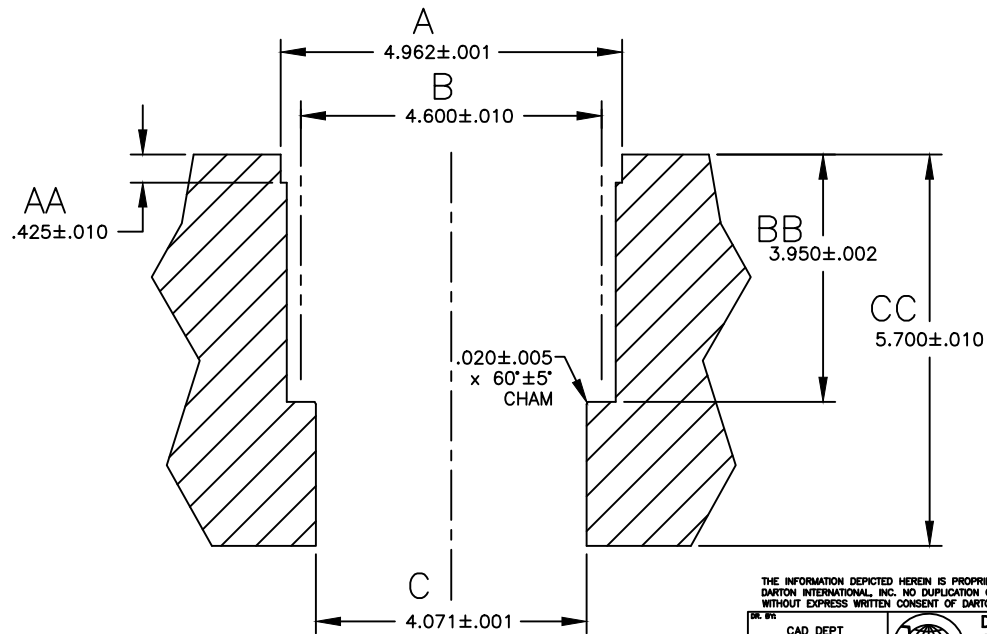

THE INFORMATION DEPICTED HEREIN IS PROPRIETARY DESIGN INFORMATION WHICH IS COPYRIGHTED DARTON INTERNATIONAL, INC. NO DUPLICATION OR USE OF THIS INFORMATION IS PERMITTED WITHOUT EXPRESS WRITTEN CONSENT OF DARTON INTERNATIONAL, INC.

DR. BY:	CAD DEPT	 Darton International, Inc. Carlsbad, CA USA (800) 713-2786 (760) 603-9895 FAX (760) 603-9629 WWW.DARTON-INTERNATIONAL.COM
DATE:	10-26-11	
DRG'D BY:		TITLE BLOCK SPECIFICATION- TOYOTA 1GR M.I.D. 94-98mm
MATERIAL:		SIZE A
HARDNESS:		DWG NO. 900-400
		SCALE 1/2
		SHEET 1 OF 1